

Clean the Mount by flushing away dirt with fresh water and/or wiping down the assemblies with a clean, damp cloth. If used in a salt water environment, flushing with fresh water and drying after use is recommended. If used extensively in a salt water environment, lightly lubricate stainless steel parts as needed. Vertical and horizontal adjustment and release mechanisms that are not kept free from debris may bind. Lubricate lightly as needed with a non-corrosive lubricant provided by your unit armorer.

CARE AND MAINTENANCE



PRODUCT IDENTIFICATION (CONT'D)

STANDARD LIMITED WARRANTY

For full warranty terms, contact Wilcox Customer Service at 603-431-1331.

WARRANTY CLAIM AND SERVICE INFORMATION

Wilcox must be contacted in the United States at (603) 431-1331 to assign a **Return Merchandise Authorization (RMA)** / **Service Call Number (SC)** prior to return shipment.

After an RMA/SC number is provided, Wilcox will accept a package at the address below, clearly marked with the number assigned as follows:

Wilcox Industries Corp.
RMA # _____
25 Piscataqua Drive
Newington, NH 03801

The product must be securely packaged, accompanied by purchasing information, a letter including sender's name, address, daytime phone number, date of manufacture, lot number and a description of the problem or work to be performed.

Manufactured by:
WILCOX®
Wilcox Industries, Corp.
25 Piscataqua Drive
Newington, NH 03801-7816
Phone: +1 888-8WILCOX
+1 603-431-1331
Fax: +1 603-431-1221



WWW.WILCOXIND.COM

For troubleshooting service questions, contact Wilcox between 8am and 5pm EST.

"Our Customer's Life Depends on It"™



PRODUCT IDENTIFICATION

OPERATION AND MAINTENANCE INSTRUCTIONS FOR THE

WILCOX®

L4 Skull Lock™ Head Mount-Lite
for the Norotos AKA-2, Cadex 643-93C
CAGE: 004F1

Mount Up!®



Wilcox L4 Skull Lock™ Head Mount-Lite
(PNs 26000G05 (Small, Black), 26000G06 (Large, Black))



© 2014-2022 Wilcox Industries Corp. All rights reserved. Printed in USA. Wilcox's Skull Lock™ Head Mount-Lite is Patent Pending. Wilcox®, "Mount Up!" and the Wilcox "X" logo are federally registered trademarks of Wilcox Industries Corp. "Our Customer's Life Depends on It" and Skull Lock™ are a trademarks of Wilcox Industries Corp. All other trademarks and registered trademarks in this manual are the property of their respective companies. Specifications and other data are subject to change without notice. **EAR99: Export license not required.**

CONFIGURATION

STEP 1 - To Don the Head Mount-Lite:

STEP 1A



PULL OUTWARD ON REAR ADJUSTMENT KNOB AND PULL TEMPLE STRAPS TO LOOSEN.

STEP 1B



PULL OUTWARD ON STRAP LATCHES AND LOOSEN ALL HARNESSES ON BOTH SIDES.

STEP 1C



UNCLIP THE CHIN STRAP.

STEP 1D



DON THE HEAD HARNESS, THEN ADJUST STRAPS AND SECURE STRAP LATCHES FOR A CUSTOM FIT.

STEP 1E




PUSH INWARD ON REAR ADJUSTMENT KNOB AND ROTATE CW TO SECURE.

STEP 2- Attach the NVG to the Head Mount-Lite:

1. SLIDE THE MOUNT RELEASE LEVER TO THE LEFT USING THE RIGHT THUMB TO UNLOCK THE MOUNT RELEASE.
2. INSERT THE TOP MOUNTING GUIDE.
3. ROTATE THE MOUNT DOWNWARD UNTIL IT SEATS.
4. SLIDE THE MOUNT RELEASE LEVER TO THE RIGHT USING THE RIGHT FOREFINGER TO SECURE.
5. PRESS THE MOUNT FIRMLY AT THE BASE TO SEAT, ALLOWING THE MOUNT TO ACHIEVE ITS POSITION.

STEP 2A

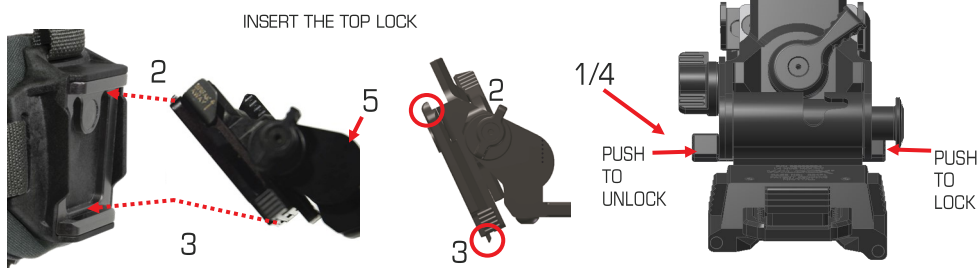

STEP 3 - To Utilize the Weight Storage Basket

STEP 3A



LIFT THE VELCRO FLAPS ON THE OUTSIDE OF THE STORAGE BASKET.

STEP 3B



OPEN THE VELCRO SEALS ON THE INNER LININGS OF THE STORAGE BASKET. INSERT SAND BAG OR WEIGHT, THEN REAFFIX VELCRO SEALS.

STEP 3C



REAFFIX THE VELCRO FLAPS ON THE OUTSIDE OF THE STORAGE BASKET.

Accommodates a Variety of Mounting Configurations, Including:

Wilcox G24 Mount



Wilcox G29 Mount



Norotos AKA-2 Mount



Cadex 643-93C Mount

